


# C-TYPE


## 3.3, 5.0 volt CMOS Oscillator

**Not recommended for new designs**

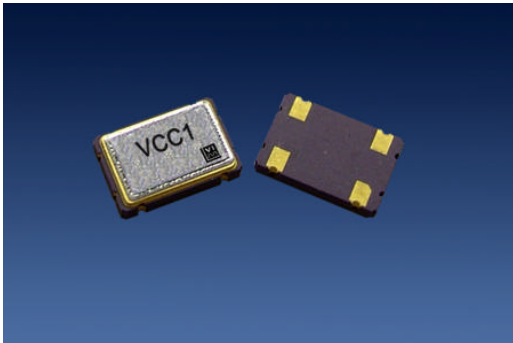

The C-TYPE Crystal Oscillator

### Features

- CMOS output
- Output frequencies to 190 MHz
- Low jitter, Fundamental or 3<sup>rd</sup> OT Crystal
- Tri-state output for board test and debug
- Gold over nickel contact pads
- Hermetically sealed ceramic SMD package
- Product is compliant to RoHS directive  and fully compatible with lead free assembly


### Applications

- SONET/SDH/DWDM
- Ethernet, Gigabit Ethernet
- Storage Area Network
- Digital Video
- Broadband Access
- Microprocessors/DSP/FPGA

### Description

Vectron's C-TYPE Crystal Oscillator (XO) is quartz stabilized square wave generator with a CMOS output, operating off a 1.8, 2.5, 3.3, or 5.0 volt supply.

The C-TYPE uses fundamental or 3<sup>rd</sup> overtone crystals resulting in low jitter performance, typically 0.5ps rms in the 12 kHz to 20MHz band. Also a monolithic IC, which improves reliability and reduces cost, is hermitically sealed.

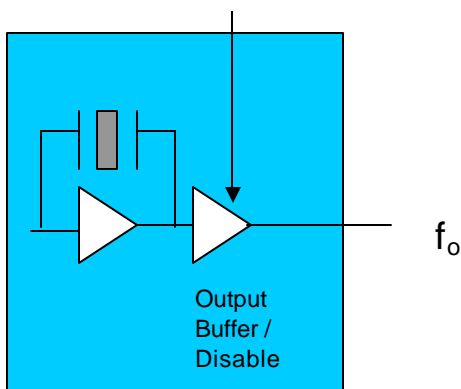

# C-TYPE Data Sheet

## Performance Characteristics

| Table 1. Electrical Performance, 5V option    |           |                    |   |                    |       |
|---|-----------|--------------------|---|--------------------|-------|
| Parameter                                     | Symbol    | Min                | Typical                                   | Maximum            | Units |
| Frequency                                     | $f_O$     | 0.012              |   | 125.000            | MHz   |
| Operating Supply Voltage <sup>1</sup>         | $V_{DD}$  | 4.5                | 5.0                                       | 5.5                | V     |
| Absolute Maximum Supply Voltage               |           | -0.7               |   | 7.0                | V     |
| Supply Current, Output Enabled                | $I_{DD}$  |                    |   |                    | mA    |
| <1.5 MHz                                      |           |                    |   | 7                  |       |
| 1.5 to 20 MHz                                 |           |                    |   | 10                 |       |
| 20.01 to 50 MHz                               |           |                    |   | 30                 |       |
| 50.01 to 85 MHz                               |           |                    |   | 50                 |       |
| 85.01 to 125 MHz                              |           |                    |   | 60                 |       |
| Supply Current, Out disabled                  | $I_{DD}$  |                    |   | 30                 | uA    |
| Output Logic Levels                           |           |                    |   |                    |       |
| Output Logic High <sup>2</sup>                | $V_{OH}$  | $0.9 \cdot V_{DD}$ |   |                    | V     |
| Output Logic Low <sup>2</sup>                 | $V_{OL}$  |                    |   | $0.1 \cdot V_{DD}$ | V     |
| Output Logic High Drive                       | $I_{OH}$  | 16                 |   |                    | mA    |
| Output Logic Low Drive                        | $I_{OL}$  | 16                 |   |                    | mA    |
| Output Rise/Fall Time <sup>2</sup>            | $t_R/t_F$ |                    |   |                    | ns    |
| < 1.00 MHz                                    |           |                    |   | 200                |       |
| 1.0 to 20.00 MHz                              |           |                    |   | 8                  |       |
| 20.01 to 50.00 MHz                            |           |                    |   | 5                  |       |
| 50.01 to 125.00 MHz                           |           |                    |   | 2                  |       |
| Duty Cycle <sup>3</sup> (ordering option)     | SYM       |                    | 45/55                                     |                    | %     |
| Operating Temperature (ordering option)       |           |                    | -10/70 or -40/85                          |                    | °C    |
| Storage Temperature                           |           | -55                |   | 125                | °C    |
| Stability <sup>4</sup> (ordering option)      |           |                    | $\pm 20, \pm 25, \pm 32, \pm 50, \pm 100$ |                    | ppm   |
| RMS Jitter, 12kHz to 20 MHz                   |           |                    | 0.5                                       | 1                  | ps    |
| Period Jitter, RMS                            |           |                    | 2.5                                       |                    | ps    |
| Output Enable/Disable <sup>5</sup>            |           |                    |   |                    | V     |
| Output Enabled                                |           | 4.0                |   |                    |       |
| Output Disabled                               |           |                    |   | 0.8                |       |
| Internal Enable Pull-Up resistor <sup>5</sup> |           |                    | 100                                       |                    | Kohm  |
| Start-up time                                 |           |                    |   | 10                 | ms    |

1. A 0.01uF and a 0.1uF capacitor should be located as close to the supply as possible (to ground) is recommended.
2. Figure 1 defines these parameters. Figure 2 illustrates the operating conditions under which these parameters are tested and specified.
3. Symmetry is measured defined as On Time/Period.
4. Includes calibration tolerance, operating temperature, supply voltage variations, aging and shock and vibration (not under operation).
5. Output will be enabled if enable/disable is left open.

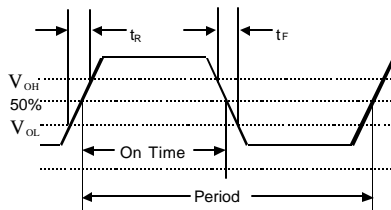


Figure 1. Output Waveform

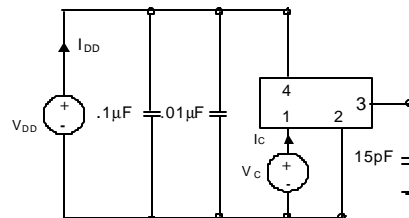


Figure 2. Typical Output Test Conditions (25±5°C)

## C-TYPE Data Sheet

| Table 2. Electrical Performance, 3.3V option  |           |   |         |                    |       |
|---|-----------|---|---------|--------------------|-------|
| Parameter                                     | Symbol    | Min                                       | Typical | Maximum            | Units |
| Frequency                                     | $f_o$     | 0.012                                     |         | 190.000            | MHz   |
| Operating Supply Voltage <sup>1</sup>         | $V_{DD}$  | 2.97                                      | 3.3     | 3.63               | V     |
| Absolute Maximum Operating Voltage            |           | -0.5                                      |         | 5.0                | V     |
| Supply Current, Output Enabled                | $I_{DD}$  |   |         |                    | mA    |
| < 1.500 MHz                                   |           |   |         | 5                  |       |
| 1.5 to 20 MHz                                 |           |   |         | 7                  |       |
| 20.01 to 50 MHz                               |           |   |         | 20                 |       |
| 50.01 to 85 MHz                               |           |   |         | 30                 |       |
| 85.01 to 190 MHz                              |           |   |         | 50                 |       |
| Supply Current, Output disabled               | $I_{DD}$  |   |         | 30                 | uA    |
| Output Logic Levels                           |           |   |         |                    |       |
| Output Logic High <sup>2</sup>                | $V_{OH}$  | $0.9 \cdot V_{DD}$                        |         |                    | V     |
| Output Logic Low <sup>2</sup>                 | $V_{OL}$  |   |         | $0.1 \cdot V_{DD}$ | V     |
| Output Logic High Drive                       | $I_{OH}$  | 8   |         |                    | mA    |
| Output Logic Low Drive                        | $I_{OL}$  | 8   |         |                    | mA    |
| Output Rise/Fall Time <sup>2</sup>            | $t_R/t_F$ |   |         |                    | ns    |
| < 1.00 MHz                                    |           |   |         | 200                |       |
| 1.00 to 20.00 MHz                             |           |   |         | 6                  |       |
| 20.01 to 50.00 MHz                            |           |   |         | 4                  |       |
| 50.01 to 90.00 MHz                            |           |   |         | 3                  |       |
| 90.01 to 190.00 MHz                           |           |   |         | 2                  |       |
| Duty Cycle <sup>3</sup> (ordering option)     | SYM       | 45/55                                     |         |                    | %     |
| Operating Temperature (ordering option)       |           | -10/70 or -40/85                          |         |                    | °C    |
| Storage Temperature                           |           | -55                                       |         | 125                | °C    |
| Stability <sup>4</sup> (ordering option)      |           | $\pm 20, \pm 25, \pm 32, \pm 50, \pm 100$ |         |                    | ppm   |
| RMS Jitter, 12kHz to 20 MHz                   |           |   | 0.5     | 1                  | ps    |
| RMS Jitter                                    |           |   | 2.5     |                    | ps    |
| Output Enable/Disable <sup>5</sup>            |           |   |         |                    | V     |
| Output Enabled                                |           | 2.0                                       |         |                    |       |
| Output Disabled                               |           |   |         | 0.5                |       |
| Internal Enable Pull-Up resistor <sup>5</sup> |           |   | 100     |                    | Kohm  |
| Start-up time                                 |           |   |         | 10                 | ms    |

1. A 0.01uF and a 0.1uF capacitor should be located as close to the supply as possible (to ground) is recommended.
2. Figure 3 defines these parameters. Figure 4 illustrates the operating conditions under which these parameters are tested and specified. For  $f_o > 90\text{MHz}$ , rise and fall time is measured 20 to 80%.
3. Symmetry is measured defined as On Time/Period.
4. Includes calibration tolerance, operating temperature, supply voltage variations, aging and shock and vibration (not under operation).
5. Output will be enabled if enable/disable is left open.

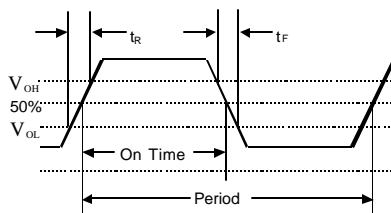


Figure 3. Output Waveform

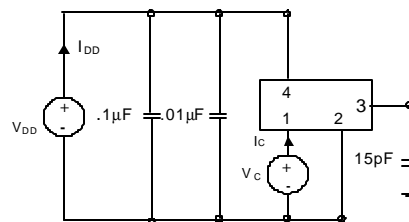


Figure 4. Typical Output Test Conditions ( $25 \pm 5^\circ\text{C}$ )

## C-TYPE Data Sheet

### Enable/Disable Functional Description


Under normal operation the Enable/Disable is left open or set to a logic high state. When the E/D is set to a logic low, the oscillator stops and the output is in a high impedance state. This helps reduce power consumption as well as facilitating board testing and troubleshooting.

### Tri-state Functional Description

Under normal operation the tri-state is left open or set to a logic high state. When the tri-state is set to a logic low, the oscillator remains active but the output buffer is in a high impedance state. This helps facilitate board testing and troubleshooting.


**Table 3. Outline Diagrams, Pad Layout and Pin Out**

| Pin # | Symbol    | Function                        |
|-------|-----------|---------------------------------|
| 1     | E/D or NC | Tri-state, Enable/Disable or NC |
| 2     | GND       | Electrical and Case Ground      |
| 3     | $f_o$     | Output Frequency                |
| 4     | $V_{DD}$  | Supply Voltage                  |

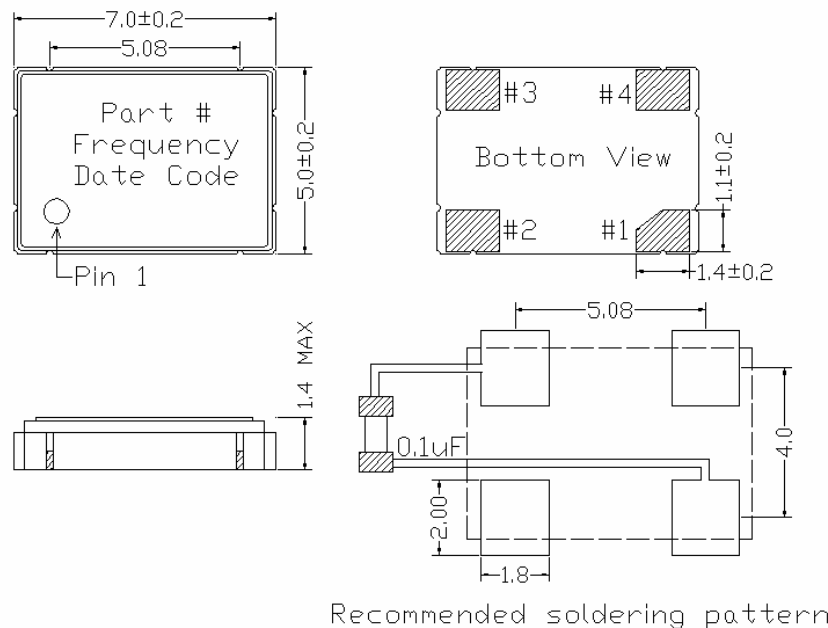

Contact Pads are gold over nickel  
**Figure 9, Package drawing**


## C-TYPE Data Sheet

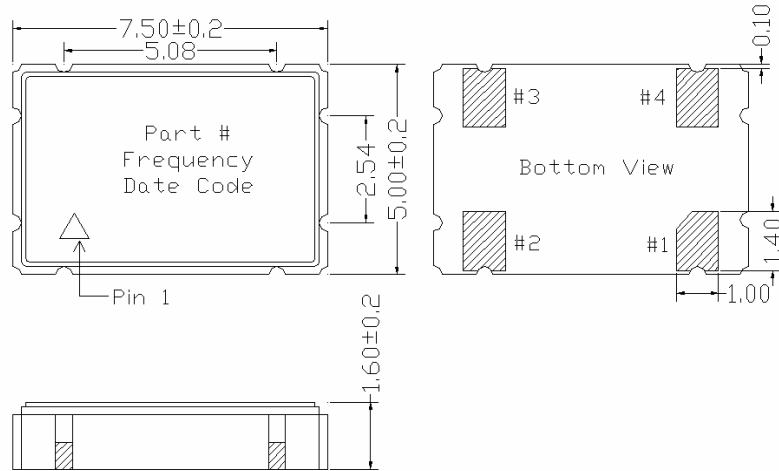

Contact Pads are gold over nickel  
**Figure 10, Alternate Package drawing**

### Tape and Reel

**Table 4: Tape and Reel Dimensions (mm)**

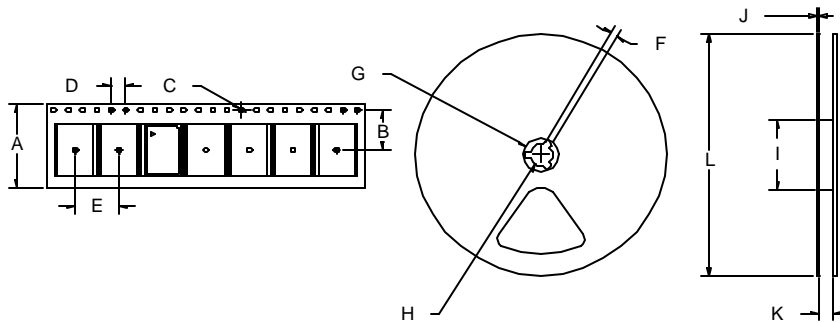

| Tape Dimensions |    |     |     |   | Reel Dimensions |   |    |    |    |   |    |     | # Per Reel |
|-----------------|----|-----|-----|---|-----------------|---|----|----|----|---|----|-----|------------|
| Product         | A  | B   | C   | D | E               | F | G  | H  | I  | J | K  | L   |            |
| C-TYPE          | 16 | 7.5 | 1.5 | 4 | 8               | 2 | 21 | 13 | 60 | 2 | 17 | 180 | 1000       |

## C-TYPE Data Sheet

### Reliability

The C-TYPE qualification tests have included:

**Table 5. Environmental Compliance**

| Parameter                  | Conditions              |
|----------------------------|-------------------------|
| Mechanical Shock           | MIL-STD-883 Method 2022 |
| Mechanical Vibration       | MIL-STD-883 Method 2007 |
| Temperature Cycle          | MIL-STD-883 Method 1010 |
| Solderability              | MIL-STD-883 Method 2003 |
| Gross and Fine Leak        | MIL-STD-883 Method 1014 |
| Resistance to Solvents     | MIL-STD-883 Method 2015 |
| Moisture Sensitivity Level | 1                       |
| Contact Pads               | Gold over Nickel        |

### Handling Precautions

Although ESD protection circuitry has been designed into the the C-TYPE, proper precautions should be taken when handling and mounting. VI employs a Human Body Model and a Charged-Device Model (CDM) for ESD susceptibility testing and design protection evaluation. ESD thresholds are dependent on the circuit parameters used to define the model. Although no industry wide standard has been adopted for the CDM, a standard HBM of resistance = 1.5kohms and capacitance = 100pF is widely used and therefore can be used for comparison purposes.

**Table 6. ESD Ratings**


| Model                | Minimum | Conditions              |
|----------------------|---------|-------------------------|
| Human Body Model     | 1000    | MIL-STD-883 Method 3115 |
| Charged Device Model | 1500    | JESD 22-C101            |

### Suggested IR profile

Devices are built using lead free epoxy and can also be subjected to standard lead free IR reflow conditions, Table 9 shows max temperatures and lower temperatures can also be used e.g. peak temperature of 220C.


**Table 7. Reflow Profile**

| Parameter                | Symbol      | Value                    |
|--------------------------|-------------|--------------------------|
| Preheat Time             | $t_s$       | 150 sec Min, 200 sec Max |
| Ramp Up                  | $R_{UP}$    | 3 °C/sec Max             |
| Time Above 217 °C        | $t_L$       | 60 sec Min, 150 sec Max  |
| Time To Peak Temperature | $t_{AMB-P}$ | 480 sec Max              |
| Time At 260 °C (max)     | $t_p$       | 10 sec Max               |
| Time At 240 °C (max)     | $t_{p2}$    | 60 sec Max               |
| Ramp Down                | $R_{DN}$    | 6 °C/sec Max             |

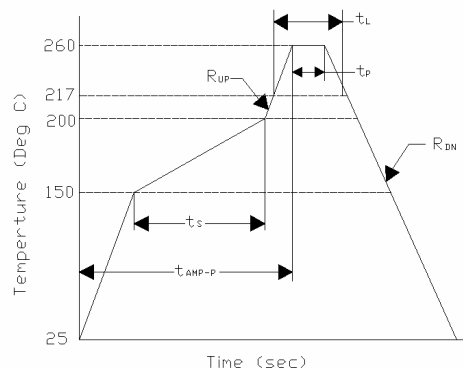

# C-TYPE Data Sheet

## Ordering Information

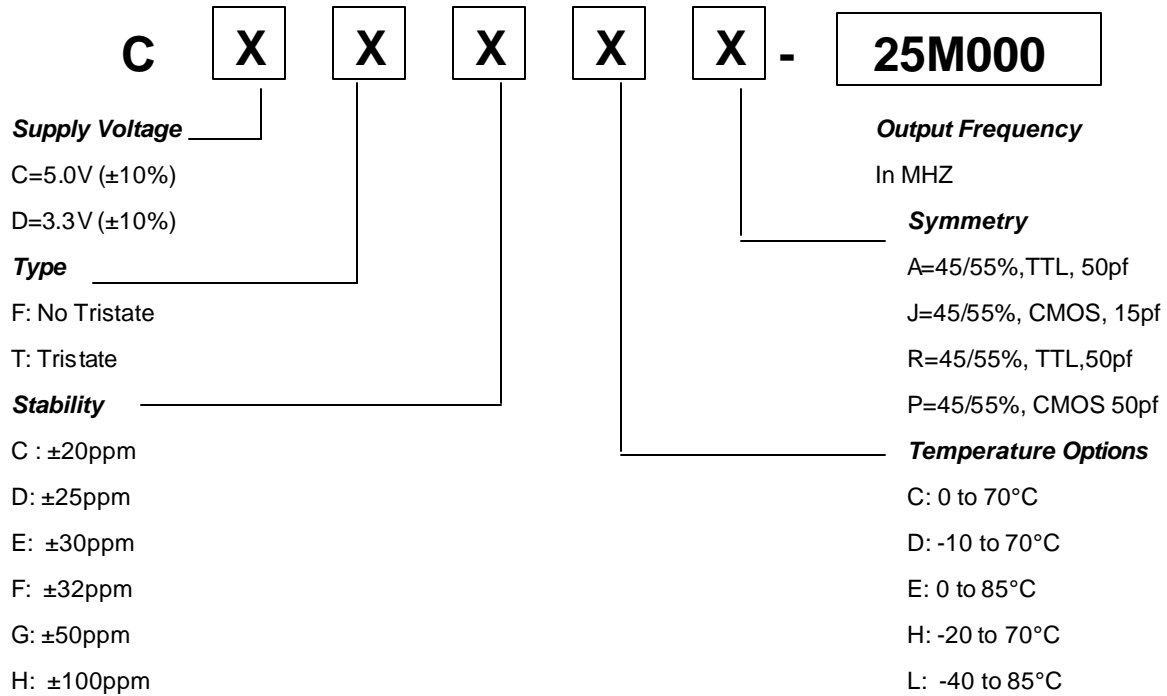

**Note: Not all combinations are available.**

**For Additional Information, Please Contact:**



**USA:** Vectron International • 267 Lowell Road, Hudson, NH 03051  
• Tel: 1-88-VECTRON-1 • Fax: 1-888-FAX-VECTRON

**EUROPE:** Landstrasse, D-74924, Neckarbischofsheim, Germany •  
Tel: 49 (0) 7268 8010 • Fax: 49 (0) 7268 801281

**ASIA:** Vectron Asia Pacific Sales 1F~2F, No.8 Workshop No.308 Fenju Rd.,  
WaiGaoQiao Free Trade Zone, Pudong New Area Shanghai, China 200131  
•Tel: 8621 50480777 • Fax: 8621 50481881

**www.vectron.com**

October27, 2006