

Tunable DWDM -200GHz


OPTOMECHANICAL TYPE

Features:

- Designed to meet Bellcore 1073 and 1221 performance and reliability standards
- Low insertion loss
- Wide working range of wavelength
- High resolution of 0.05nm for different add/drop channel
- Operating types under direct and RS-232 control
- Stepping motor motion type
- Compact size of 16x47x85 mm

Applications:

- DWDM System
- CATV Fiber optic Links
- Fiber Amplifier System
- Telecommunications
- Local Area Network
- Testing Instruments

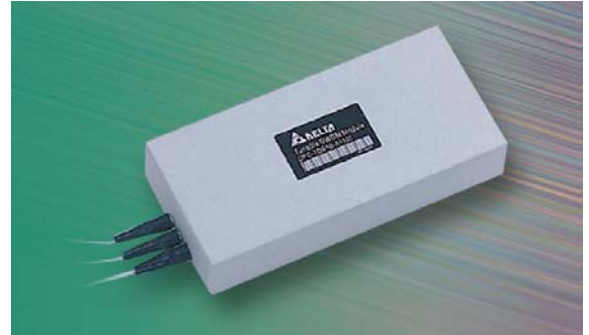

Model Name: OPC-TDS4C-A1200

Specifications	Unit	
Insertion Loss ¹	dB	1.8 typ (3.7 max)
Return Loss	dB	-40 max
Resolution	nm	0.05
PDL	dB	0.15 typ (0.3 max)
Wavelength Range ²	nm	1527.22~1568.77 (Ch.63~Ch.11) 1519.48~1544.53 (Ch.73~Ch.41) 1544.53~1568.77 (Ch.41~Ch.11)
Fiber Type		Single Mode
Response Time ³	Sec.	1.4
Nominal Operating Voltage ⁴	V _{dc}	5
Control		Stepping Motor
Bandwidth (@-0.5dB)	nm	0.8 typ (0.4 min)
Bandwidth (@-20dB)	nm	2.2 typ (2.6 max)
Housing Dimensions (HxWxL)	mm	16x47x85
Operating Temperature	°C	0 ~ 65
Storage Temperature	°C	-40 ~

All specifications referenced without connectors

1. Without fiber optic connectors
2. Other wavelength range also available for customer demand
3. Bandwidth changed from 1527.22nm to 1568.77nm, 41.55nm changed time record
4. Operating voltage of stepping motor same as RS-232 control type 5 V_{dc}


DELTA ELECTRONICS, INC.

(TAOYUAN PLANT II) 252, SHANG YING ROAD, KUEI SAN SHIANG, TAOYUAN SHIEN 333, TAIWAN R.O.C.

TEL: +886-3-3591968 FAX: +886-3-3591991

<http://www.deltaww.com>

Dimension:

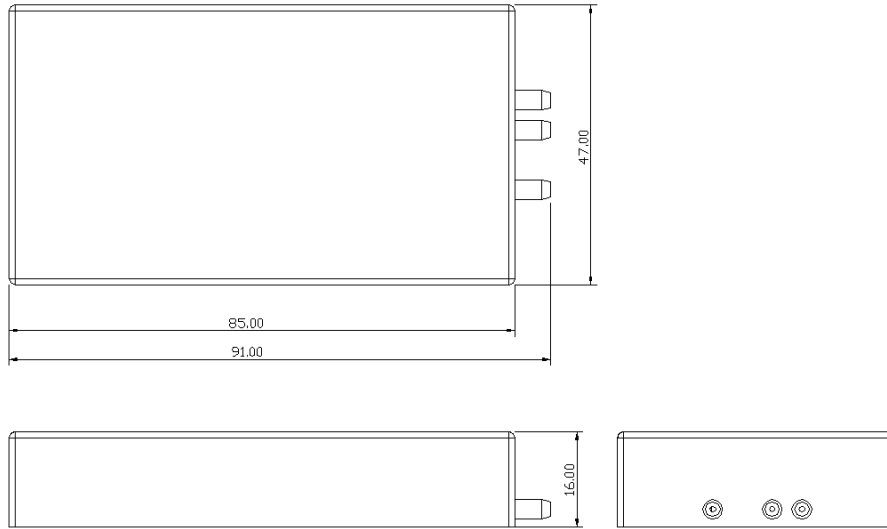


Order Information:

OPC Tunable XWDM Model Name

EX: OPC-TDS4C-A1200

OPC - **T X X X X** - **X X X XX**

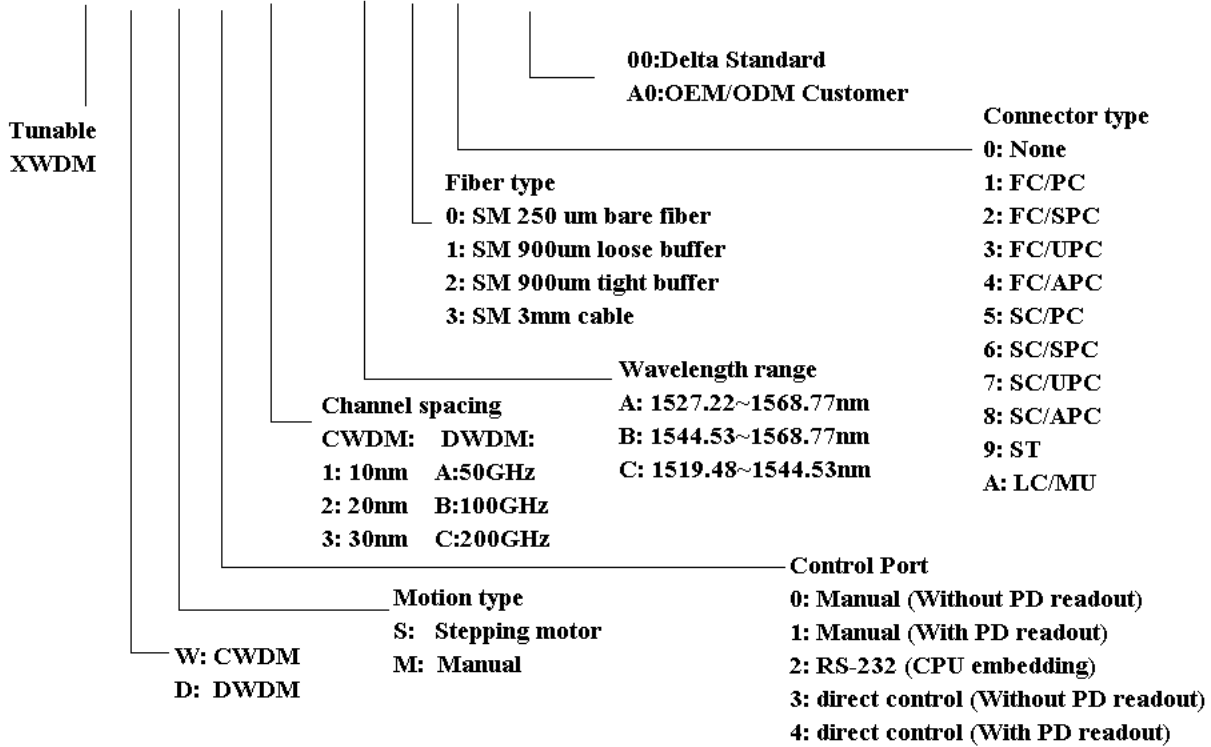

DELTA ELECTRONICS, INC.

(TAOYUAN PLANT II) 252, SHANG YING ROAD, KUEI SAN SHIANG, TAOYUAN SHIEN 333, TAIWAN R.O.C.

TEL: +886-3-3591968 FAX: +886-3-3591991

<http://www.deltaww.com>