



Insulated Terminals Molded Diallyl

Double Turret Refer to Figure 764

External Threads

Part No.	Thread	W	X	Y	Z	Term Dia	DWV
764	4-40	.250	.218	.593	.940	.140	8400
764A	6-32	.250	.188	.593	.940	.140	8400
764B	6-32	.250	.250	.593	.940	.140	8400
764C	6-32	.250	.312	.593	.940	.140	8400
764D	6-32	.250	.375	.593	.940	.140	8400
764E	4-40	.250	.188	.593	.940	.140	8400
764F	4-40	.250	.250	.593	.940	.140	8400
765	4-40	.250	.218	.375	.720	.140	6000
765A	6-32	.250	.188	.375	.720	.140	6000
765B	6-32	.250	.250	.375	.720	.140	6000
765C	6-32	.250	.312	.375	.720	.140	6000
765D	6-32	.250	.375	.375	.720	.140	6000
765E	4-40	.250	.188	.375	.720	.140	6000
765F	4-40	.250	.250	.375	.720	.140	6000
765G	6-32	.250	.218	.375	.720	.140	6000

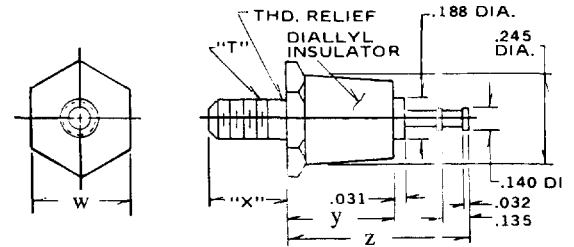


Fig. 764

Double Turret Refer to Figure 784

External Threads

Part No.	Thread	W	X	Y	Z	Term Dia	DWV
784	6-32	.250	.218	.593	.840	.093	8400
784A	6-32	.250	.188	.593	.840	.093	8400
784B	6-32	.250	.250	.593	.840	.093	8400
784C	6-32	.250	.312	.593	.840	.093	8400
784D	6-32	.250	.375	.593	.840	.093	8400
784E	4-40	.250	.188	.593	.840	.093	8400
784F	4-40	.250	.250	.593	.840	.093	8400
785	6-32	.250	.218	.375	.620	.093	6000
785A	6-32	.250	.188	.375	.620	.093	6000
785B	6-32	.250	.250	.375	.620	.093	6000
785C	6-32	.250	.312	.375	.620	.093	6000
785D	6-32	.250	.375	.375	.620	.093	6000
785E	4-40	.250	.188	.375	.620	.093	6000
785F	4-40	.250	.250	.375	.620	.093	6000

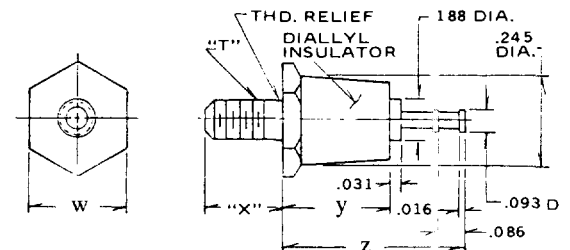


Fig. 784

Standard Plating Suffix to Part Number

See Page 93 for all plating options.

Terminal

-55 (Sn over Cu)
Reflowed

or

Base

-12 (Ni over Cu)

TOLERANCE: .xxx ±.010, .xx ±.016 (ALL DIMS. BEFORE PLATING)



Insulated Terminals Molded Diallyl



Double Turret

Refer to Figure 1409

External Threads

Part No.	Thread	W	X	Y	Z	Terminal	DWV
1409A	6-32	.250	.188	.266	.500	1280	6000
1409B	6-32	.250	.250	.266	.500	1280	6000
1409C	6-32	.250	.312	.266	.500	1280	6000
1409D	6-32	.250	.375	.266	.500	1280	6000
1409E	4-40	.250	.188	.266	.500	1280	6000
1409F	4-40	.250	.250	.266	.500	1280	6000
1409G	4-40	.250	.312	.266	.500	1280	6000
1409H	4-40	.250	.375	.266	.500	1280	6000
1418A	6-32	.312	.188	.359	.590	1280	7500
1418B	6-32	.312	.250	.359	.590	1280	7500
1418C	6-32	.312	.312	.359	.590	1280	7500
1418D	6-32	.312	.375	.359	.590	1280	7500
1418E	4-40	.312	.188	.359	.590	1280	7500
1418F	4-40	.312	.250	.359	.590	1280	7500
1418G	4-40	.312	.312	.359	.590	1280	7500
1418H	4-40	.312	.375	.359	.590	1280	7500
1421A	6-32	.312	.188	.844	1.080	1280	8400
1421B	6-32	.312	.250	.844	1.080	1280	8400
1421C	6-32	.312	.312	.844	1.080	1280	8400
1421D	6-32	.312	.375	.844	1.080	1280	8400
1421E	4-40	.312	.188	.844	1.080	1280	8400
1421H	4-40	.312	.375	.844	1.080	1280	8400

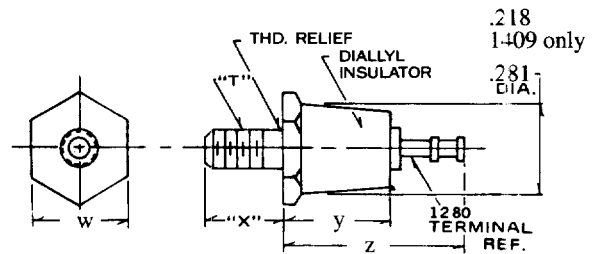


Fig. 1409

Standard Plating Suffix to Part Number

See Page 93 for all plating options.

Terminal
 -7 (Au over Cu)
 -4 (Sb over Cu)

or

Base
 -12 (Ni over Cu)
 -12 (Ni over Cu)

TOLERANCE: .xxx ±.010, .xx ±.016 (ALL DIMS. BEFORE PLATING)