


Specification for monolithic crystal filter:


MQF 10.7-2600/05V0

1. General

1.1. Package:

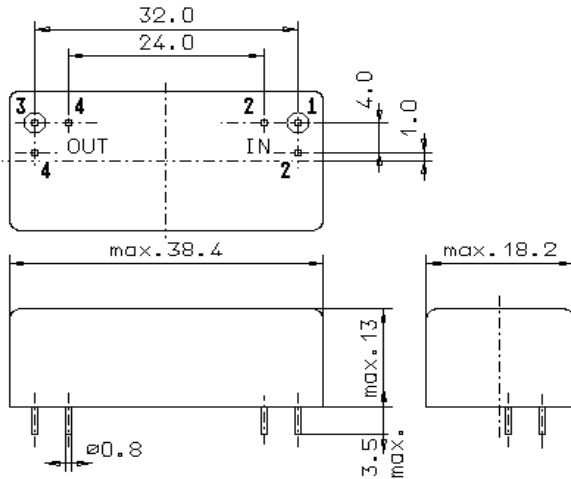

GM17

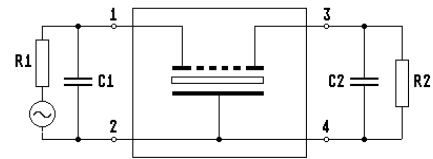

- | | |
|-----------------------------------|--------------------|
| 1.2. Type name: | MQF 10.7-2600/05V0 |
| 1.3. Number of poles: | 10 |
| 1.4. Operable temperature range: | -30°C to +80°C |
| 1.5. Operating temperature range: | -20°C to +70°C |
| 1.6. Storage temperature range: | -55°C to +80°C |

2. Electric values

- | | |
|---------------------------------------|----------|
| 2.1. Nominal centre frequency f_0 : | 10.7 MHz |
|---------------------------------------|----------|

2.2. Pass band

- | | |
|---|------------------------------------|
| 2.2.1. Centre frequency f_c : | 10.7 MHz \pm 300 Hz |
| 2.2.2. Bandwidth between 3 dB - frequencies: | $\geq \pm 13$ kHz |
| 2.2.3. Ripple: | ≤ 1.5 dB at $f_0 \pm 6.0$ kHz |
| 2.2.4. Insertion loss:
(measured on smallest attenuation in pass band) | ≤ 3.0 dB |

2.3. Stop band

- | | |
|------------------------------|--------------|
| 2.3.1. $f_0 \pm 25$ kHz | ≥ 80 dB |
| 2.3.2. Ultimate attenuation: | ≥ 90 dB |

- | | |
|--|-----------------------|
| 2.4. Terminating impedance (input and output): | 910 Ω // 25 pF |
|--|-----------------------|

- | | |
|-------------|---|
| 3. Marking: | manufacturer, date code
MQF 10.7-2600/05V0 |
|-------------|---|

- | | |
|----------------------------|---|
| 4. Environment conditions: | Corresponding to Vectron standard CF001 |
|----------------------------|---|

Edited by: _____ date: _____ name: _____